












# IRRICUP




A SOLUÇÃO SEM AR ÚNICA  
COM PEGADA ESTENDIDA

## 290/85R38CW (11.2-38CW) DADOS TÉCNICOS

										
GRÖSSE	RIM	LAST INDEX / SS	FELGENART	SW	OD	STATISCHER RADIUS	FELGENTIEFE	FÜLLDRUCK	MAX. GESCHWINDIGKEIT	MAX. LAST
				mm	mm	mm	mm	bar	km/h	Kg
				in	in	in	1/32	psi	mp/h	Lb
290/85R38CW (11.2-38CW)	ASSY	132 CREEP	ND	290	1,477	673	38	SEM AR	CREEP	2,000
				11.4	58.1	26.5	48	SEM AR	CREEP	4,409

### HOMOGENE, ERHÖHTE AUFSTANDSFLÄCHE

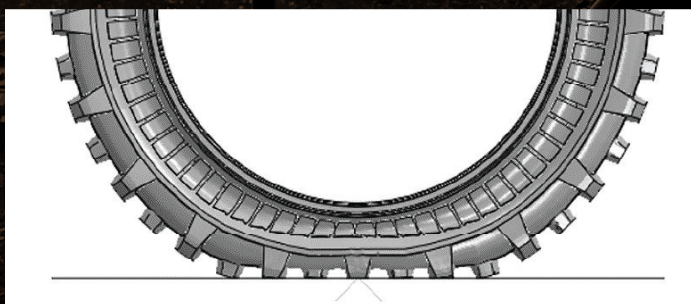

GALILEOWHEEL.COM // INFO@GALILEOWHEEL.COM

### NOSSOS BENEFÍCIOS



SEM AR



AUMENTO DA  
TRAÇÃO



FLUTUAÇÃO  
SUPERIOR



COMPACTAÇÃO  
REDUZIDA DO  
SOLO



CAPACIDADE DE  
RODAGEM SEM  
PRESSÃO



AUTO LIMPEZA